

RG Protector® Series

Protector® Series Standby Generators

Liquid-Cooled Gaseous Engine

1 of 11

STANDARD FEATURES

- Power Zone® 410 controller
- Cellular Connectivity with Wi-Fi® backup for Mobile Link and Fleet¹
- Quiet Operation
- Corrosion Resistant Aluminum Enclosure
- 5 Year/2,000 Hour Limited Warranty
- High Motor-Starting & Surge Capacity
- <5% Total Harmonic Distortion Power Quality
- Model-Specific Fuel - Propane or Natural Gas
- EPA Emissions Certified
- CA & MA Emissions Compliant
- UL 2200 Listed

1 - Cellular service for the US, Canada, and other supported countries using the Generac Generator Connectivity Accessory, Cellular (GGCAC). Cellular is the primary mode for connectivity with Wi-Fi as a secondary mode when a cellular connection is not possible.

OPTIONAL FIELD-INSTALLABLE FEATURES

Available as field-installable kits

- Push Button Emergency Stop
- NFPA 110 System Control & Remote Annunciation
- Cold Weather Operation Heaters

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **MOBILE LINK® CONNECTIVITY:** Standard with the Generac Liquid-Cooled RG Protector Series home standby-commercial generators, Mobile Link Cellular connectivity with Wi-Fi backup allows users to monitor generator status from anywhere in the world using a smart phone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account to an authorized service provider for proactive service. With Mobile Link, users are taken care of before the next power outage.
- **TRUE POWER™ ELECTRICAL TECHNOLOGY:** Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic equipment and micro-chip based appliances, such as variable speed HVAC systems.
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION:** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's extensive service network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- **GENERAC TRANSFER SWITCHES:** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is the GENERAC product line is offered with its own transfer systems and controls for total system compatibility.

STANDBY POWER RATING

Model RG13090 - 130 kW, 60 Hz, Emergency Standby Generator
Model RG15090 - 150 kW, 60 Hz, Emergency Standby Generator



Product may vary from above image.



QUIET-TEST™

GENERAC®
Mobile Link™

EPA Emissions Certified, CA & M Emissions Compliant

GENERATOR SPECIFICATIONS

GENERATOR OUTPUT

PROPANE

Voltage	RG13090		RG15090	
	Power (kW)	Current (A)	Power (kW)	Current (A)
120/240 V 1-Phase	130	542	134	558
208/120 V 3-Phase	130	451	140	486
240/120 V 3-Phase	130	391	140	421
480/277 V 3-Phase	130	195	140	210

NATURAL GAS

Voltage	RG13090		RG15090	
	Power (kW)	Current (A)	Power (kW)	Current (A)
120/240 V 1-Phase	130	542	144	600
208/120 V 3-Phase	130	451	150	520
240/120 V 3-Phase	130	391	150	451
480/277 V 3-Phase	130	195	150	226

Emergency Standby Power (ESP) Rating: Standby ratings apply to installations served by a reliable utility source. The ESP rating is applicable to varying loads for the duration of a power outage. The average power output over 24 hours shall not exceed 70% of the ESP rating.

VOLTAGE REGULATION

Type	Digital	
Sensing	1-Phase	
Regulation	±1%	

ALTERNATOR SYSTEM

Circuit Breaker (CB) Size (A)	RG13090	RG15090
	120/240 V 1-Phase	600
	208/120 V 3-Phase	500
	240/120 V 3-Phase	400
	480/277 V 3-Phase	225
Alternator Type	Synchronous	Synchronous
Stator Insulation Class	H	H
Stator Insulation Class	H	H
Telephone Interference Factor (TIF)	<50	<50
Bearings	Sealed Ball	Sealed Ball
Coupling	Flexible Disc	Flexible Disc
Excitation System	Synchronous Brushless	Synchronous Brushless
Total Harmonic Distortion	<5%	<5%

SURGE CAPACITY

Surge Amps at <0.4 Power Factor	RG13090	RG15090
	30% Voltage Dip (A)	30% Voltage Dip (A)
120/240 V 1-Phase	900	900
208/120 V 3-Phase	816	816
240/120 V 3-Phase	707	707
480/277 V 3-Phase	351	351

GENERATOR SPECIFICATIONS

ENGINE SYSTEM

	RG13090	RG15090
Make	Generac	
Model	9 L, V-type 8-Cylinder, Turbocharged & Aftercooled	
Compression Ratio	9.1:1	
Lifter Type	Hydraulic	
Oil Pump Type	Gear	
Oil Filter Type	Full Flow Spin-on Cartridge	
Crankcase Capacity (qt (L))	10.5 (9.9)	
Temperature Derate	LPV Fuel	22% per 10 °F above 77 °F (19.8% per 5 °C above 25 °C)
	NG Fuel	16% per 10 °F above 77 °F (14.4% per 5 °C above 25 °C)
Altitude Derate	3% per 1,000 ft above 600 ft (1% per 100 m above 183 m)	2.1% per 1,000 ft above 600 ft (0.7% per 100 m above 183 m)
Exercise Speed (rpm)	1,500	
Operating Speed (rpm)	1,800	

GOVERNOR

Type	Electronic
Frequency Regulation	Isochronous
Steady State Regulation	±0.25%

COOLING SYSTEM

Coolant	50/50 (50% Ethylene Glycol)
Coolant System Capacity (US gal (L))	6.3 (24)
Water Pump Type	Belt Driven
Fan Type	Belt Driven
Fan Quantity	1
Exhaust Flow at Rated Output (CFM (m ³ /min))	1,200 (34.0)
Maximum Ambient Air Temperature (°F (°C))	122 (50)

GENERATOR SPECIFICATIONS

FUEL SYSTEM

Usable Fuels	Liquid Propane (LP) Vapor or Natural Gas (NG)
Fuel Type Configuration	Model-Specific, Not Selectable
LP Vapor Pressure (in H ₂ O (kPa))	7-11 (1.74-2.74)
NG Pressure (in H ₂ O (kPa))	7-11 (1.74-2.74)
Fuel Shutoff Solenoid	Standard

FUEL CONSUMPTION

LIQUID PROPANE

Rated Load	RG13090		RG15090	
	(US gph)	(L/h)	(US gph)	(L/h)
25%	4.7	17.9	5.1	19.4
50%	7.6	28.9	8.4	31.8
75%	10.6	40.0	11.9	44.9
100%	13.5	51.1	15.3	58.1

Propane - 91,452 BTU/US gal (25.5 MJ/L); 36 ft³/US gal (0.27 m³/L); 2,516 BTU/ft³ (93.7 MJ/m³); 4.24 lb/US gal (0.508 kg/L).

NATURAL GAS

Rated Load	RG13090		RG15090	
	(CFH)	(m ³ /h)	(CFH)	(m ³ /h)
25%	509	14.4	562	15.9
50%	858	24.3	964	27.3
75%	1,204	34.1	1,353	38.3
100%	1,554	44.0	1,769	50.1

Natural Gas - 1,036 BTU/ft³ (37.3 MJ/m³).

See Emissions Data Sheets for maximum fuel flow for EPA and SCAQMD permitting purposes.

ELECTRICAL SYSTEM

System Voltage (V)	12
Charge Alternator (A)	40
Battery Charger (A)	5
Recommended Battery (included)	Group 31, 925 CCA Minimum

ENCLOSURE

	RG13090	RG15090
Sound Level at Exercise Speed (dB(A)) @23 ft (7 m) ²	68	71
Sound Level at Operating Speed & No Load (dB(A)) @23 ft (7 m)) ²	72	77
Color	Bisque	

² - Lowest sound level measurement of eight locations around the generator. Sound levels at other locations may vary depending on the installation.

POWER ZONE 410 CONTROLLER



Standard Features:

- 128 x 64 Graphical Display with Heater
- Multilingual
 - English
 - French
 - Spanish
 - Portuguese
- 3-Phase Sensing Digital Voltage Regulator
- Full Range Standby Operation
- Full System Status
 - 3-Phase AC Voltage
 - 3-Phase Current
 - Power
 - Power Factor
 - Oil Pressure
 - Engine Coolant Temperature
 - Oil Temperature (check for oil temp sensor)
 - Fuel Pressure
 - Engine Speed
 - Battery Voltage
 - Output Frequency
 - Time
 - Date
 - Load On Line Power and Gen Power
 - Hourmeter
 - Service Reminders
 - Fault History (Alarm Log)
- Remote Communications
- Programmable Auto Crank
- Emergency Stop
- Not in Auto Flashing Light
- Selectable Low Speed Exercise
- NFPA 110 System Control Capable
- 5A Integrated Battery Charger

Standard Protections:

- Low Oil Pressure
- Low Coolant Level
- High/Low Coolant Temperature
- Oil Temperature
- Over/Under Speed
- Over/Under Voltage
- Over/Under Frequency
- Over/Under Current

- Overload
- Battery Voltage
- Battery Charger Current
- Phase-to-Phase and Phase-to-Neutral Short Circuits (I^2T Algorithm)
- Ground Fault

Display:

- Easy Menu Structure
- Multilingual (English, Spanish, French, and Portuguese)
- On Screen Editable Parameters

● Key Function Monitoring

- 3-Phase Voltage, Amperage, Power, Apparent Power, Reactive Power
- Selectable Average or Line-to-Neutral Voltage Measurements
- Frequency
- Engine Speed
- Engine Coolant Temperature
- Oil Pressure
- Battery Voltage
- Warning and Alarm Indication
- Diagnostics
- Maintenance Events/Information
- Hourmeter

Control Panel:

- AUTO/OFF/MANUAL
 - Operation Through Onboard Buttons or Optional Key Switch
 - Indication Through Display Screen and LEDs
- Audible Alarm and Silence
- Auxiliary Shutdown Rocker Switch (on controller)
- Not-in-Auto Indication

Voltage Regulation:

- Digital Control
- 3-Phase Sensing
- Variable V/F Slope Settings
- Negative Power Limit
- Loss of Sensing Protection
- Fault Protection (I^2T Function)
- High Voltage Limit
- Low Voltage Limit
- Maximum Power Limit

Governor Functionality:

- Speed Control through ECM Integration

Communications Ports:

- 1 CANbus Port
- 1 USB Port (for Configuration Transfer and Firmware Upgrades)
- 1 RS-485 Modbus Master Port (for External RAP/RRP/External I/O Modules)
- 1 RS-485 Modbus Slave Port (for other uses, e.g. Building Management)
- 2 RS-232 Communication Ports (for connectivity device or other uses)

Codes And Standards:

- UL 6200
- CE
- NFPA 110

AVAILABLE ACCESSORIES

PRODUCT	PART NUMBER	DESCRIPTION
Control System Kits		
Generac Generator Connectivity Accessory Cellular (GGCAC)	G0072150	The GGCAC provides a reliable cellular connection with Wi-Fi backup for the generator. Monitoring of the generator is possible for the owner using Mobile Link and for the servicer using Fleet. Generator owners will have peace-of-mind knowing the generator status at any time and be able to get support when needed. RG13090 and RG15090 generators which do not already have the GGCAC require the A0005792571 Wire Harness to install it in. NEW RG13090 and RG15090 generators INCLUDE the GGCAC as standard.
RG13090-RG15090 GGCAC Wire Harness	A0005792571	Wire harness <u>required</u> to connect the G0072150 Generac Generator Connectivity Accessory Cellular to the Power Zone 410 controller in the RG13090 and RG15090. NEW RG13090 and RG15090 generators INCLUDE the GGCAC as standard.
Enclosure Mounted Emergency Stop Kit	G0065100	Emergency stop consists of a red push button switch. It mounts to the exterior of the generator enclosure replacing the Generator Emergency Shutdown rocker switch in the same location.
Remote Emergency Stop Kit, Surface Mount	G0099250	Emergency stop consists of a red push button switch with twist release. The emergency stop switch has an aluminum enclosure which can be mounted extending out from a surface. It mounts remote from generator such as near an electrical panel.
Remote Emergency Stop Kit, Flush Mount	G0099260	Emergency stop consists of a red push button switch with twist release. The emergency stop switch has an aluminum enclosure which can be mounted flush. It mounts remote from generator such as near an electrical panel.
Remote Emergency Stop Kit, Break Glass	G0099270	Emergency stop consists of a spring-loaded switch behind breakable glass. The glass can be broken with the tethered hammer. The switch has an aluminum enclosure which can be mounted remote from the generator such as near an electrical panel.
Generac Load Manager, 50 A	G0070001	50 A Load Manager helps optimize the performance of the standby generator by managing large electrical loads upon startup and shed them to aid in recovery when overloaded.
Generac Load Manager, 100 A	G0070061	100 A Load Manager helps optimize the performance of the standby generator by managing large electrical loads upon startup and shed them to aid in recovery when overloaded.
Generac LTE Propane Tank Fuel Level Monitor	G0070090	The Propane Tank Fuel Level Monitor connects to 4G LTE cellular service to measure and report the amount of LP fuel remaining in the tank. The app alerts the user of both remaining LP fuel levels and usage reports, offering the ultimate peace of mind.
400 A 3-Pole Circuit Breaker (CB) Kit	G0098850	400 A Circuit Breaker Kit designed for 3-phase models built with a factory installed circuit breaker greater than 400 A.
Power Zone Kits		
NFPA 110 Controller Kit	G0080470	Includes controller module with Key Switch, Alarm Horn, and Emergency Stop Switch which connects to the Power Zone 410 controller; 10 A battery charger; and wire harness. The G0098511, G0098521, or G0098531 panel and a capable transfer switch are required to be considered for NFPA 110 system control and remote annunciation.
Remote Announcer Panel with 8 Relays	G0098511	Remote announcer panel with relays. The panel mounts in the structure which is connected to the backup generator.
Remote Relay Panel	G0098521	Remote relay panel without LEDs or keypad. The panel mounts in the structure which is connected to the backup generator.
Remote Announcer Panel without Relays	G0098531	Remote announcer panel without relays. The panel mounts in the structure which is connected to the backup generator.
Power Zone 410 I/O Extender Kit	G0098370	The kit expands I/O for the Power Zone 410 controller to provide connections for additional accessories. It connects to the controller with a 3-wire RS-485 interface.
Power Zone Gateway Kit	G0089370	The Gateway provides an Ethernet connection port for the generator for a Building Management System (BMS). The Gateway is NOT intended for or able to be used with Mobile Link or Fleet.

AVAILABLE ACCESSORIES

Operating Environment Kits		
Battery Heater Kit	G0098830	Recommended for operating environments where the temperature drops below 32 °F (0 °C). The heater is externally powered by 120 VAC, 60 Hz. Fits RG10090, RG13090, and RG15090 models.
Engine Block Heater Kit	G0098840	Recommended for operating environments where the temperature drops below 0 °F (-18 °C). The heater is externally powered by 120 VAC, 60 Hz. Fits RG10090, RG13090, and RG15090 models.
Installation Kits		
Base Plug Kit	G0056510	Base plugs to fit in the lifting holes of the baseframe to keep debris out.
Maintenance Kits		
8.9 L Gaseous Engine Regular Maintenance Kit	G0098820	Regular maintenance kit includes oil filter, oil funnel, air filter, and spark plugs. Applies to RG10090, RG13090, and RG15090.
Bisque Paint Kit	G0057030	If the generator enclosure is scratched or damaged, it is important to touch-up the paint to protect from future corrosion. The paint kit includes the necessary paint to correctly maintain or touch-up a generator enclosure.
Transfer Switch Kits		
3-Phase Voltage Sensing Kit for 208/120 & 240/120V RTS Transfer Switch	G0074110	3-Phase Voltage Sensing Kit required for RTS Transfer Switches when used with the Power Zone 410 controller for 'G' 208/120 or 'J' 240/120 V 3-phase voltage; applies to three-phase RG13090 and RG15090 models with 'G' or 'J' voltage.
3-Phase Voltage Sensing Kit for 480/277 V RTS Transfer Switch	G0074120	3-Phase Voltage Sensing Kit required for RTS Transfer Switches when used with the Power Zone 410 controller for 'K' 480/277 V 3-phase voltage; applies to three-phase RG13090 and RG15090 models with 'K' voltage.

INSTALLATION LAYOUT

130 KW


Drawing #A0001618959 (1 of 2)

NOTE:

1. MINIMUM RECOMMENDED CONCRETE PAD SIZE: 16" LARGER PER SIDE THAN FRAME
2. 156" (5'2") WIDE, 300 (12'2") LONG. PAD SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
3. ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 70 AND NFPA 10 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
4. CONTROL PANEL ACCESS ASSEMBLY ON LEFT SIDE OF GENERATOR.
5. CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
6. BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
7. REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
8. ACCESSIBLE THROUGH BATTERY AREA. BATTERY AREA CONNECTION, NEUTRAL CONNECTION, AND ACCESS TO BATTERY AREA ARE FOR AC/DC LEAD CONDUIT CONNECTIONS AND ACCESS TO TRANSFER BATTERIES.
9. MUST ALLOW FREE FLOW OF INLET, AIR, DISCHARGE, AIR AND EXHAUST. SEE SPEC SHEET FOR MINIMUM AIR FLOW AND MAXIMUM RESTRICTION REQUIREMENTS.
10. GENERATOR MUST BE INSTALLED SUCH THAT FRESH COOLING AIR IS AVAILABLE AND THAT DISCHARGE AIR FROM RADIATOR IS NOT RECOLLECTED.
11. REMOVE FRONT END PANEL TO ACCESS EXHAUST MUFFLER ACCESS AVAILABLE THROUGH DOORS TO FAN BELT.

90L	90L
EITHER SIDE	EITHER SIDE
RIGHT SIDE	RIGHT SIDE
LEFT SIDE	LEFT SIDE
OIL FILTER	OIL FILTER
RIGHT SIDE	RIGHT SIDE
LEFT SIDE	LEFT SIDE
OIL DRAIN HOSE	RADIATOR DRAIN HOSE
COOLANT RECOVERY BOTTLE	COOLANT RECOVERY BOTTLE
RADIATOR FILL CAP	RADIATOR FILL CAP
AIR CLEANER ELEMENT	AIR CLEANER ELEMENT
SPARK PLUGS	SPARK PLUGS
MAF METER	MAF METER
FAN BELT	FAN BELT
BATTERY	BATTERY

REFERENCE OWNERS MANUAL
FOR PERIODIC REPLACEMENT
PART LISTINGS.

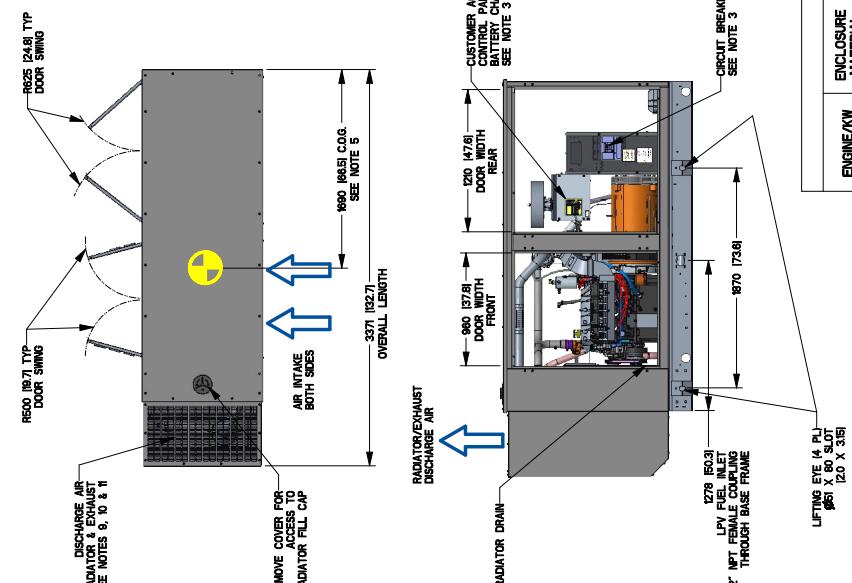


DIMENSIONS: MM [INCH]

ENGINE/NW	ENCLOSURE MATERIAL	WEIGHT GENSET KG [LBS]	WEIGHT ONLY KG [LBS]	SHIPPING WEIGHT KG [LBS]
90L/30kW	AL	1385 (3008)	80 (176)	1445 (3195)

INSTALLATION LAYOUT

Drawing #A0001618959 (2 of 2)

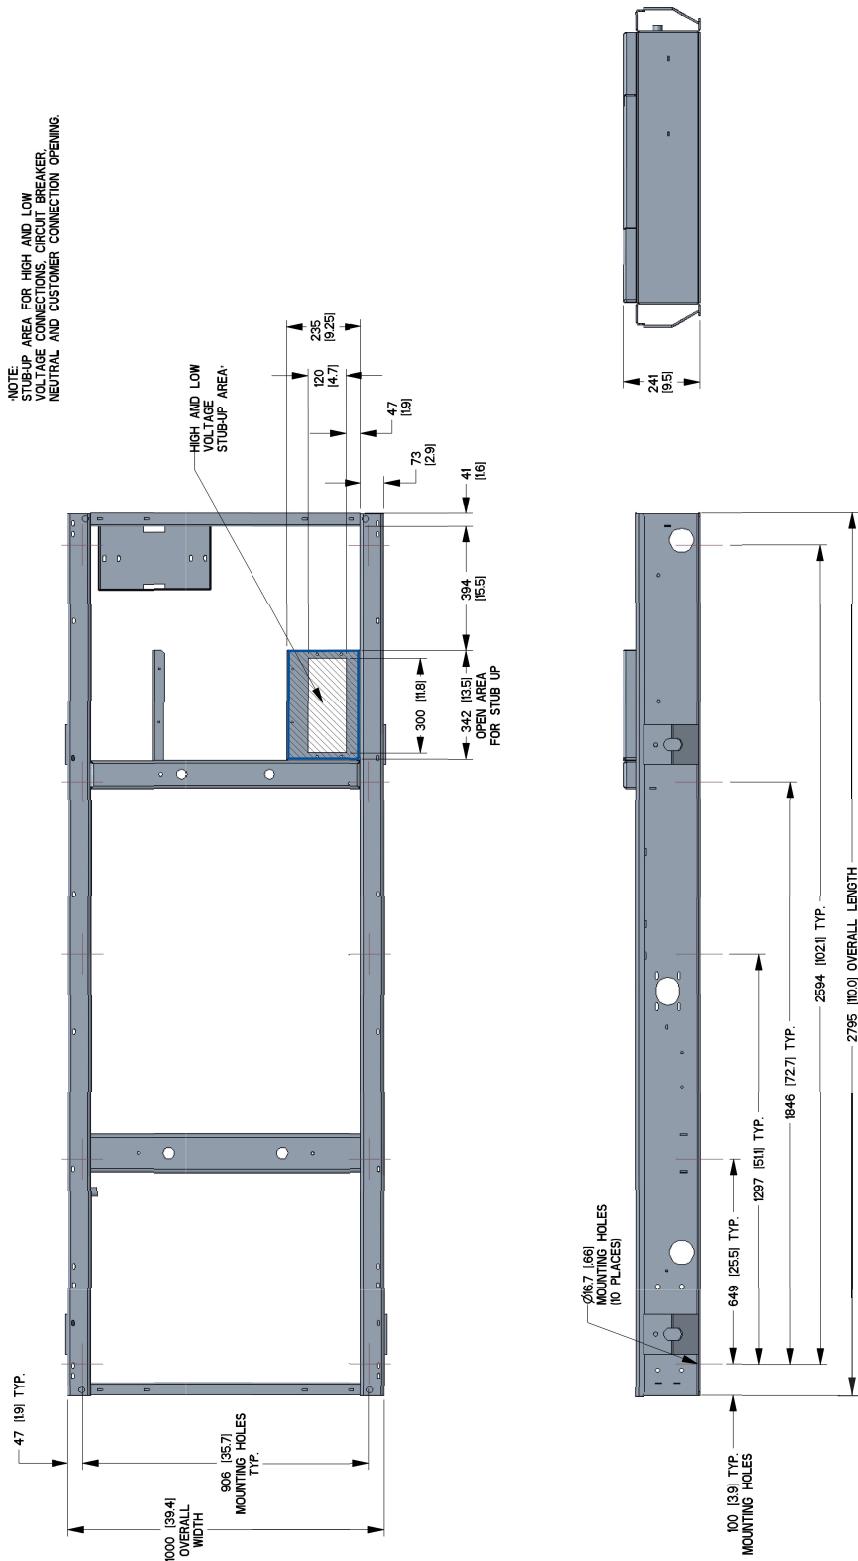





INSTALLATION LAYOUT

150 KW

Drawing #A0001618957 (1 of 2)

ITEM	DESCRIPTION	QTY
OL. FIL. CAP	OL. FILTER CAP	1
OL. DIP STICK	OL. DIP STICK	1
OL. THER.	OL. THERMOMETER	1
OL. DRAIN HOSE	OL. DRAIN HOSE	1
RADIATOR DRAIN HOSE	RADIATOR DRAIN HOSE	1
COOLANT RECOVERY BOTTLE	COOLANT RECOVERY BOTTLE	1
RADIATOR FIL. CAP	RADIATOR FILTER CAP	1
AIR CLEANER ELEMENT	AIR CLEANER ELEMENT	1
SPARK PLUGS	SPARK PLUGS	4
NUFFLER	NUFFLER	1
FAN BELT	FAN BELT	1
BATTERY	BATTERY	1
SOIL	SOIL	1
EITHER SIDE	EITHER SIDE	1
RIGHT SIDE	RIGHT SIDE	1
LEFT SIDE	LEFT SIDE	1
RIGHT SIDE	RIGHT SIDE	1
LEFT SIDE	LEFT SIDE	1
RIGHT SIDE	RIGHT SIDE	1
TOP	TOP	1
EITHER SIDE	EITHER SIDE	1
EITHER SIDE	EITHER SIDE	1
NOTE 11	NOTE 11	1
EITHER SIDE	EITHER SIDE	1
RIGHT SIDE	RIGHT SIDE	1

**REFERENCE OWNERS MANUAL
FOR PERIODIC REPLACEMENT
PART LISTINGS.**

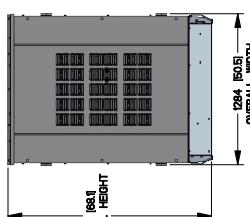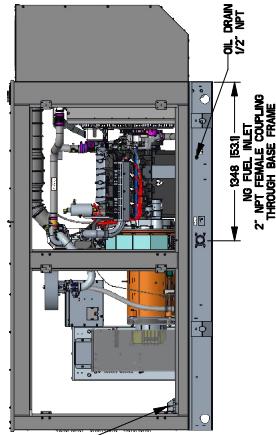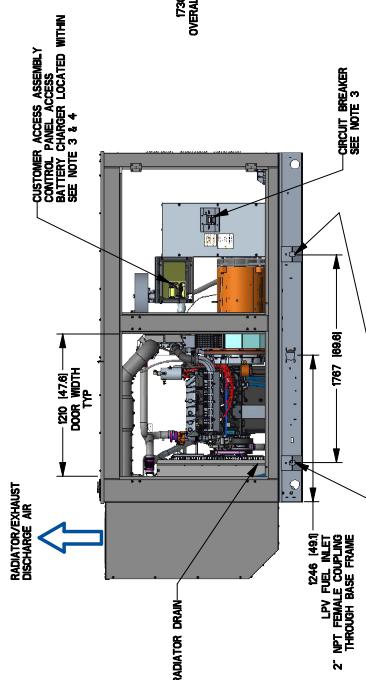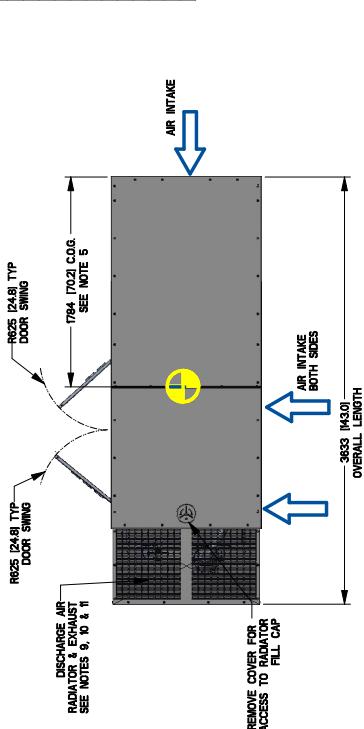

WEIGHT DATA					
ENGINE/KW	ENCLOSURE MATERIAL	WEIGHT GENSET ONLY (LB/S)	WEIGHT SKID (KG/LBS)	WEIGHT KG (LBS)	SHIPPING WEIGHT KG (LBS)
50 / 50KW	Al	14471	132776	1312991	1618125601

MINI-SNEAKERS

INSTALLATION LAYOUT

Drawing #A0001618957 (2 of 2)

